




EPS Counter Slope Insulation Boards

Insulation board made of expanded polystyrene rigid foam resistant to compression with a gradient of 4% in accordance with ÖNORM

Applications:

New builds and renovations with flat, non-sloping supporting structures, roofs allowing vehicle and foot traffic, green roofs

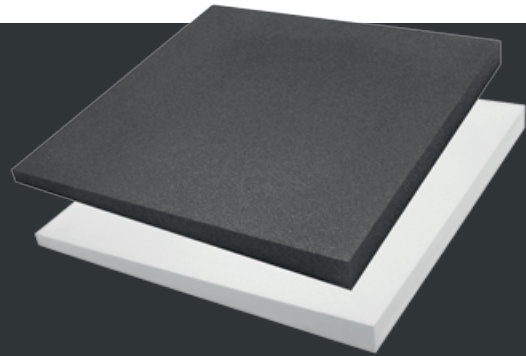

Product types:

EPS-W 20 | W 20 Plus to ÖNORM B 6000

EPS-W 25 | W 25 Plus to ÖNORM B 6000

EPS-W 30 | W 30 Plus to ÖNORM B 6000

Board size:

1000 x 1000 mm

Thicknesses available:

5 – 165 mm

Technical Data	W 20	W 25	W 30	W 20 Plus	W 25 Plus	W 30 Plus
Thermal conductivity – rated λ_D (W/(m.K))	0.038	0.036	0.035	0.031	0.031	0.030
Compressive stress at 10% deformation (kPa)	≥ 100	≥ 120	≥ 150	≥ 100	≥ 120	≥ 150
Reaction to fire in accordance with ÖNORM EN 13501-1: E						

Storage: Protect against direct sunlight

Thickness (mm)*	Article Numbers			Packaging Unit	
	W 20	W 25	W 30	m ² /Pack	Qty/Pack
5 – 45	14202005G45	14202505G45	14203005G45	16.0	16
45 – 85	14202045G85	14202545G85	14203045G85	6.0	6
85 – 125	14202085G125	14202585G125	14203085G125	4.0	4
125 – 165	142020125G165	142025125G165	142030125G165	2.0	2

Thickness (mm)*	Article Numbers			Packaging Unit	
	W 20 Plus	W 25 Plus	W 30 Plus	m ² /Pack	Qty/Pack
5 – 45	14202005G45G	14202505G45G	14203005G45G	16.0	16
45 – 85	14202045G85G	14202545G85G	14203045G85G	6.0	6
85 – 125	14202085G125G	14202585G125G	14203085G125G	4.0	4
125 – 165	142020125G165G	142025125G165G	142030125G165G	2.0	2

* Other thicknesses on request